


# Product Description

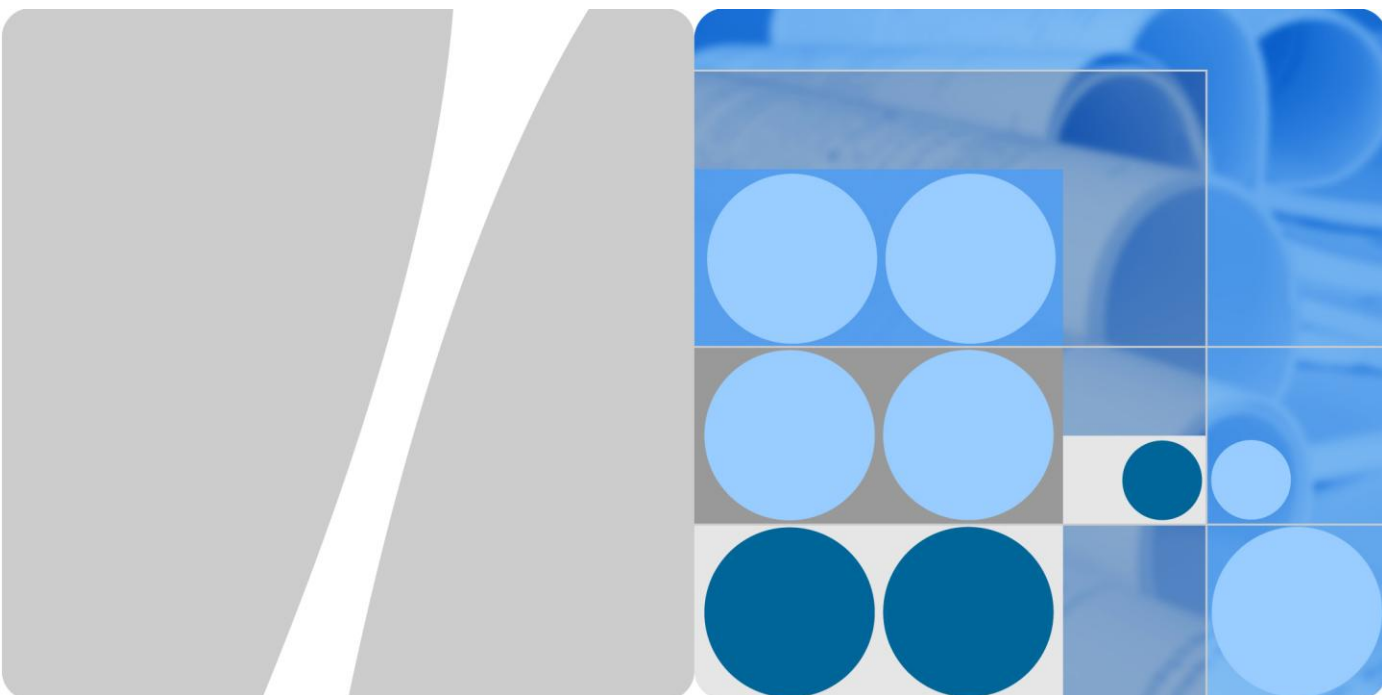

HUAWEI R205 Mobile WiFi  
V100R001

**Issue** 02  
**Date** 2011-11-22

HUAWEI TECHNOLOGIES CO., LTD.



Huawei Technologies Co., Ltd. provides customers with comprehensive technical support and service. Please feel free to contact our local office or company headquarters.

## Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

Website: <http://www.huawei.com>

Email: [mobile@huawei.com](mailto:mobile@huawei.com)

### **Copyright © Huawei Technologies Co., Ltd. 2011. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

### **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

### **Notice**

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

---

# About This Document

---

## Summary

This document provides information about the major functions, supported services, system architecture, and technical references.

The following table lists the contents of this document.

Chapter	Details
1 Overview	The supported network modes, basic services and functions, and the appearance of the product.
2 Features	The supported features and technical specifications of the product.
3 Services and Applications	The services and applications of the product.
4 System Architecture	The architecture of the product.
5 Technical Reference	The technical references of the product.
6 Packing List	The items contained in the package of the product.

## History

Issue	Details	Date
01	First release.	2011-09-06
02	Update.	2011-11-22

---

# Contents

---

<b>1 Overview .....</b>	<b>6</b>
<b>2 Features .....</b>	<b>8</b>
2.1 Main Features .....	8
2.2 Technical Specifications .....	9
2.2.1 Hardware .....	9
2.2.2 Software.....	10
<b>3 Services and Applications .....</b>	<b>12</b>
3.1 Data Service .....	12
3.1.1 USB Modem .....	12
3.1.2 Wireless Modem .....	12
3.2 SMS.....	13
<b>4 System Architecture .....</b>	<b>14</b>
4.1 System Architecture .....	14
4.2 Functional Modules .....	15
<b>5 Technical Reference .....</b>	<b>16</b>
5.1 DATACOM Products.....	16
5.2 Wireless Um Interface .....	16
<b>6 Packing List.....</b>	<b>20</b>

# 1 Overview

---

HUAWEI R205 Mobile WiFi (hereinafter referred to as the R205) is a high-speed packet access universal serial bus (USB) modem. It is a multi-mode wireless terminal for SOHO (Small Office and Home Office) and business professionals. The R205 supports:

- HSPA+/HSPA/UMTS 2100/900/850 MHz, EDGE/GPRS/GSM 1900/1800/900/850 MHz

The R205 supports the following standards:

- High Speed Packet Access Plus(HSPA+)
- High Speed Uplink Packet Access (HSUPA)
- High Speed Downlink Packet Access (HSDPA)
- Universal Mobile Telecommunications System (UMTS)
- Enhanced Data rates for Global Evolution (EDGE)
- General Packet Radio Service (GPRS)
- Global System for Mobile communications (GSM)

The R205 provides the following services:

- HSPA+ packet data service of up to 21 Mbit/s
- HSPA (HSUPA/HSDPA)/UMTS packet data service of up to 14.4 Mbit/s
- EDGE/GPRS packet data service of up to 236.8 Kbit/s
- UMTS/GSM Short Message Service (SMS)

You can connect the R205 with the USB interface of a computer, or connect the R205 with the Wi-Fi. In the service area of the HSPA/UMTS/EDGE/GPRS/GSM network, you can surf the Internet and send/receive messages/emails cordlessly. The R205 is fast, reliable, and easy to operate. Thus, mobile users can experience many new features and services with the R205. These features and services will enable a large number of users to use the R205 and the average revenue per user (ARPU) of operators will increase substantially.

Figure 1-1 shows the profile of the R205.

**Figure 1-1** R205 profile



# 2 Features

---

## 2.1 Main Features

The R205 mainly supports the following features:

- HSPA+ (DL) data service of up to 21 Mbit/s
- HSPA+ (UL) data service of up to 5.76 Mbit/s
- HSDPA (DL) data service of up to 14.4 Mbit/s
- HSUPA (UL) data service of up to 5.76 Mbit/s
- UMTS PS domain data service of up to 384 Kbit/s
- EDGE packet data service of up to 236.8 Kbit/s
- GPRS packet data service of up to 85.6 Kbit/s
- PS domain data service based on UMTS and GSM
- SMS based on CS/PS domain of GSM and UMTS
- Wi-Fi
- Built-in DHCP Server, DNS RELAY and NAT
- Plug and play (PnP)
- USB Extension Cable, easy to connect
- OLED screen
- Standard Micro USB interface
- Built-in UMTS and WLAN high gain antenna
- Micro Secure Digital Memory (microSD) Card
- Windows XP, Windows Vista, Windows 7, MAC OS X 10.5, 10.6 and 10.7.



## 2.2 Technical Specifications

### 2.2.1 Hardware

Table 2-1 lists the hardware specifications.

**Table 2-1** Hardware specifications

Item	Specifications	
Technical standard	<ul style="list-style-type: none"> <li>• WAN: HSPA+/HSPA/UMTS/EDGE/GPRS/GSM</li> <li>• WLAN: IEEE 802.11b/g/n</li> </ul>	
Operating frequency	HSPA+/HSPA/UMTS	2100/900/850MHz
	EDGE/GPRS/GSM	1900/1800/900/850MHz
	WLAN: 2.401GHz–2.495GHz	
Internal memory	128MB Flash, 64MB Memory	
Maximum transmitter power	UMTS: $\geq 24$ (+/-3) dBm	
	WLAN (Battery mode)	802.11b: 7.5 (+/-3) dBm
		802.11g: 6.5 (+/-3) dBm
		802.11n: 6.5 (+/-3) dBm
	WLAN (Power adapter mode)	802.11b: 14 (+/-3) dBm
		802.11g: 12 (+/-3) dBm
802.11n: 7 (+/-3) dBm		
Receiver sensitivity	UMTS: -106dBm	
	WLAN 802.11b: -76dBm@11Mbps/-82dBm@1Mbps	
	WLAN 802.11g: -65dBm@54Mbps	
	WLAN 802.11n: -64dBm@65Mbps	
WLAN speed	802.11b: Up to 11Mbit/s	
	802.11g: Up to 54Mbit/s	
	802.11n: Support MCS0–MCS7; Up to 72.2Mbit/s.	
Maximum power consumption	3.5 W	
Power supply	<ul style="list-style-type: none"> <li>• AC: 100V–240V</li> <li>• DC: 5V, 1A</li> </ul>	

Item	Specifications
Battery	<ul style="list-style-type: none"> <li>• Type: Li (Rechargeable)</li> <li>• Capacity: 3.7 V, 1500 mAh</li> <li>• Maximum working time: 4.5 hours</li> <li>• Maximum standby time: 250 hours</li> </ul>
External interfaces	USB interface: Micro USB
	Standard microSD card interface
	SIM card: standard 6-pin SIM card interface
Display screen	OLED
Key-press	Power switch, Reset switch
Antenna	<ul style="list-style-type: none"> <li>• Built-in GSM/UMTS main diversity antenna</li> <li>• Built-in UMTS diversity antenna</li> <li>• Built-in WLAN antenna</li> </ul>
Dimensions (D x W x H)	95.5mm×48.6mm×14.1mm
Weight	about 80g (including the battery)
Temperature	<ul style="list-style-type: none"> <li>• Operating: -10°C to +35°C</li> <li>• Storage: -20°C to +70°C</li> </ul>
Humidity	5% to 95%(non-condensing)

## 2.2.2 Software

Table 2-2 lists the software specifications.

**Table 2-2** software specifications

Item	Description
SMS	<ul style="list-style-type: none"> <li>• Writing/Sending/Receiving</li> <li>• Sending/Receiving extra-long messages</li> <li>• Storage: Up to 1000 messages can be saved in the internal memory of the R205.</li> <li>• New message prompt</li> </ul>
Network connection setup	<ul style="list-style-type: none"> <li>• APN management: create, delete and edit.</li> <li>• Set up network connection.</li> </ul>

Item	Description
WLAN setup	<ul style="list-style-type: none"> <li>• SSID broadcasting and hiding</li> <li>• Open system and shared key authentication</li> <li>• ASCII and HEX keys</li> <li>• 64/128-bit WEP encryption</li> <li>• 256-bit WPA-PSK and WPA2-PSK encryption</li> <li>• TKIP and AES encryption algorithm</li> <li>• TKIP and AES integrated encryption algorithm</li> <li>• STA management</li> </ul>
Firewall setup	<ul style="list-style-type: none"> <li>• Firewall Switch</li> <li>• LAN IP Filter</li> <li>• Virtual Server</li> <li>• DMZ Service</li> <li>• UPnP Service</li> <li>• WAN Ping block</li> </ul>
DHCP setup	<ul style="list-style-type: none"> <li>• DHCP server enabling and disabling</li> <li>• Address pool of the DHCP server setup</li> <li>• DHCP lease time setup</li> </ul>
Software installation	Automatic installation (PNP)
Other	Network connection settings: <ul style="list-style-type: none"> <li>• Automatic network selection and registration</li> <li>• Manual network selection and registration</li> </ul>
	Network status display: signal, operator name, system mode, and so on.
	Selection of network connection types
	PIN management: activate/deactivate PIN, PIN lock, changing PIN, unblocking by using the PUK.
System requirement	<ul style="list-style-type: none"> <li>• Windows XP, Windows Vista, Windows 7</li> <li>• Mac OS X 10.5, 10.6 and 10.7</li> <li>• Your computer's hardware system should meet or exceed the recommended system requirements for the installed version of OS</li> <li>• Display resolution: 1024×768 or above</li> </ul>


# 3 Services and Applications

## 3.1 Data Service

### 3.1.1 USB Modem

After you connect the R205 and PC with a USB data cable, the R205 driver is installed on the PC automatically and the shortcut of the WEB page is displayed on the PC desktops. You can configure APN on the R205 WEB page (or directly use the default settings) and set up a network connection. Then you can send or receive E-mail, access the network through wireless connection, and download files through wireless data channels.

**Figure 3-1** One-device access via USB

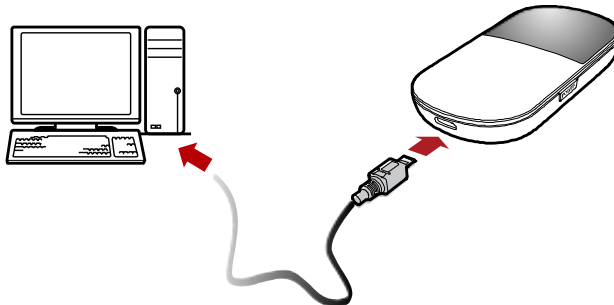


### 3.1.2 Wireless Modem


The R205 can be used as a wireless modem when the Wi-Fi is enabled. You can access the Internet service through setting up the wireless network connection with the R205.

A maximum of eight wireless users can access the R205 at the same time. You can set up the WLAN with the access point (AP) function.

**Figure 3-2** Multi-device access via Wi-Fi

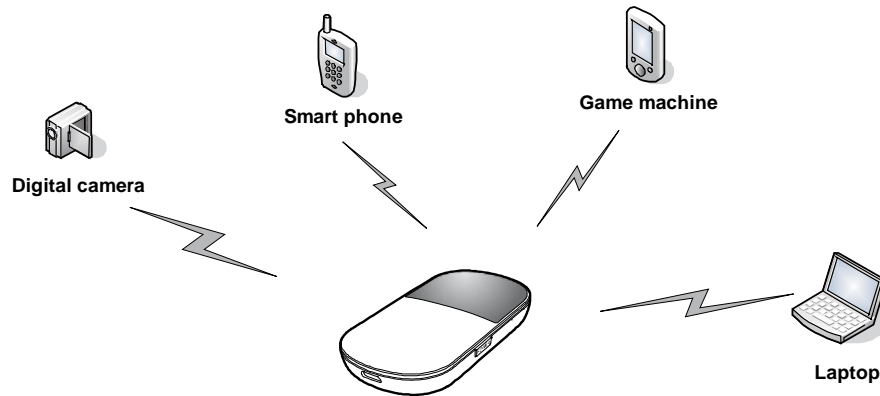

**Figure 3-3** Multi-device access via Wi-Fi and USB at the same time

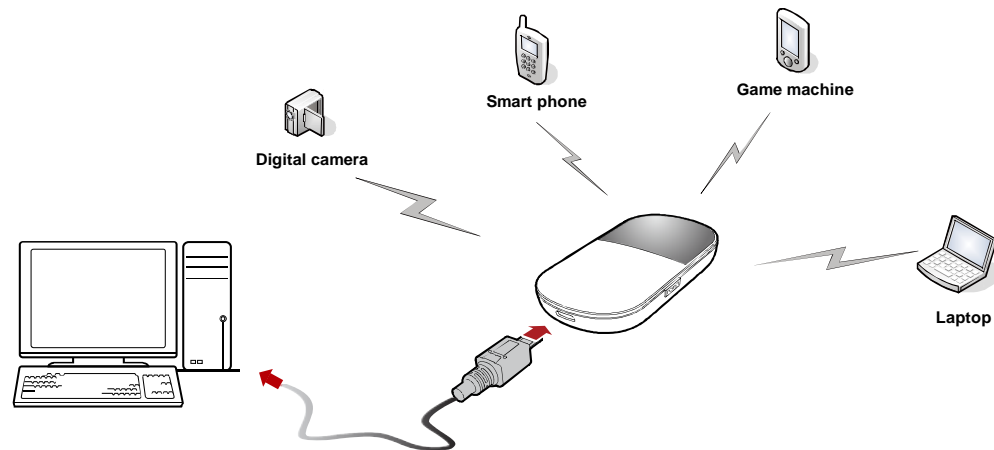

## 3.2 SMS


The R205 supports message writing/sending/receiving. You can manage messages through the WEB page, such as an inbox, an outbox and a draft.

# 4 System Architecture

## 4.1 System Architecture

Figure 4-1 shows the system architecture.

**Figure 4-1** System architecture

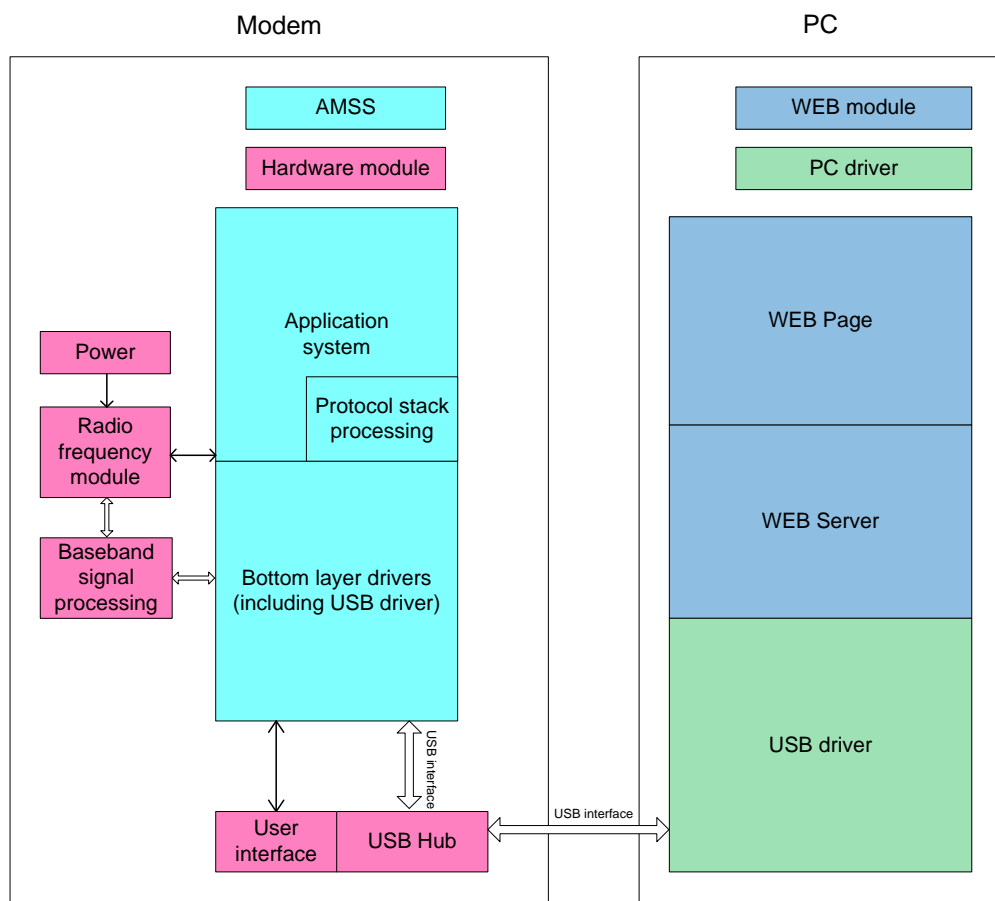

## 4.2 Functional Modules

1. **Radio Frequency Module:** It sends/receives radio signals and modulates/demodulates the radio frequency (RF) signals and baseband signals.
2. **Baseband Signal Processing:** It processes HSPA+/HSPA/UMTS/EDGE/GPRS/GSM baseband digital signals, including:
  - Modulating/Demodulating HSPA+/HSPA/UMTS baseband signals
  - Modulating/Demodulating EDGE/GPRS/GSM baseband signals
  - Encoding/Decoding HSPA+/ HSPA/UMTS channel
  - Encoding/Decoding EDGE/GPRS/GSM channel
3. **Bottom Layer Driver:** It drives peripherals, including USB, OLED, microSD and SIM.
4. **Protocol Stack System:** It processes protocols of HSPA+/HSPA/UMTS/EDGE/GPRS/GSM.
5. **Application System:** It sends laptop commands to the bottom layer protocol for processing and returns the value to the laptop. Existing applications include the following:
  - Message management
  - CS/PS domain service management
6. **User Interface:** It provides interfaces to connect peripherals. Interfaces are for microSD and SIM.
7. **Application Management:** Through the application window, you can set the parameters of the R205 and operate the R205.

# 5 Technical Reference

## 5.1 DATACOM Products

Table 5-1 shows the standards and communication protocols of the DATACOM products.

**Table 5-1** Standards and Communication Protocols of the DATACOM Products

Item	Description
Physical Layer	RFC894
PPP	RFC1915, RFC1962, RFC1994, RFC2433, RFC2759, RFC1332, RFC1877, RFC1471, RFC1570, RFC2484, RFC1717, RFC1934, RFC1990, RFC1334, RFC1974, RFC1661
ARP	RFC826
IP	RFC791, RFC1122, RFC1071, RFC1141, RFC1624, RFC792, RFC950, RFC1256
ICMP	RFC792, RFC950, RFC1256
TCP	RFC793
UDP	RFC768
DHCP	RFC1531, 1533
NAT	RFC1631

## 5.2 Wireless Um Interface

The wireless Um interface conforms to the UMTS R99, R4, R5, R6 and R7 standards.



**Table 5-2** Standards and Communication Protocols of the Wireless Um Interface

Item	Description
Layer1 Specifications (Physical)	<p>Examples of Channel Coding and Multiplexing TR 25.944 (V3.3.0)</p> <p>Physical Layer – General Description TS 25.201 (V3.1.0)</p> <p>Physical Channels and Mapping of Transport Channels onto Physical Channels (FDD) TS 25.211 (V3.5.0)</p> <p>Multiplexing and Channel Coding (FDD) TS 25.212 (V3.5.0)</p> <p>Spreading and Modulation (FDD) TS 25.213 (V3.4.0)</p> <p>Physical Layer – Procedures (FDD) TS 25.214 (V3.5.0)</p> <p>Physical Layer – Measurements (FDD) TS 25.215 (V3.5.0)</p>
Layer 2 Specifications (MAC/RLC)	<p>MAC Protocol Specification TS 25.321 (V3.6.0)</p> <p>RLC Protocol Specification TS 25.322 (V3.5.0)</p>
Layer 3 Specifications (RRC)	<p>UE Interlayer Procedures in Connected Mode TS 25.303 (V3.6.0)</p> <p>UE Procedures in Idle Mode TS 25.304 (V3.5.0)</p> <p>RRC Protocol Specification TS 25.331 (V3.5.0)</p>
Layer 3 NAS/Core Network (MCM)	<p>Architectural Requirements for Release 1999 TS 23.121 (V3.5.1)</p> <p>NAS Functions Related to Mobile Station (MS) in Idle Mode TS 23.122 (V3.5.0)</p> <p>Mobile Radio Interface Signaling Layer 3 – General Aspects TS 24.007 (V3.6.0)</p> <p>Mobile Radio Interface Layer 3 Specification – Core Network TS 24.008 (V3.6.0)</p> <p>PP SMS Support on Mobile Radio Interface TS24.011 (V3.5.0)</p>
GSM Protocol Specifications	<p>Mobile Radio Interface Layer 3 Specification, Radio Resource Control Protocol TS 04.18 (V8.10.0)</p> <p>Mobile Station - Base Station System (MS - BSS) interface; Data Link (DL) Layer Specification TS 04.06 (V8.11.0)</p> <p>Digital Cellular Telecommunications System (Phase 2+); Multiplexing and Multiple Access on the Radio Path TS 05.02 (V8.9.0)</p> <p>Technical Specification Group GERAN; Channel coding TS 05.03 (V8.6.1)</p> <p>Digital Cellular Telecommunications System (Phase 2+); Radio Subsystem Link Control TS 05.08 (V8.a.0)</p> <p>Digital Cellular Telecommunications System (Phase 2+); Radio Subsystem Synchronization TS 05.10 (V8.8.0)</p>

Item	Description
GPRS Protocol Specifications	<p>Overall Description of the GPRS Radio Interface; stage 2 TS 3.64 (V8.8.0)</p> <p>Mobile Radio Interface Layer 3 Specification TS 04.08 (V8.0.0)</p> <p>Mobile Radio Interface Layer 3 Specification: Radio Resource Control Protocol TS 04.18 (V8.10.0)</p> <p>General Packet Radio Service (GPRS): Mobile Station (MS) – Base Station System (BSS) interface; Radio Link Control / Medium Access Control (RLC/MAC) protocol TS 04.60 (V8.10.0)</p> <p>Mobile Station - Serving GPRS Support Node (MS-SGSN) Logical Link Control (LLC) Layer Specification TS 04.64 (V8.6.0)</p> <p>Mobile Station - Serving GPRS Support Node (MS-SGSN); Subnetwork Dependent Convergence Protocol (SNDTCP) TS 04.65 (V8.1.0)</p> <p>Multiplexing and Multiple Access on the Radio Path TS 05.02 (V8.9.0)</p> <p>Channel Coding TS 05.03 (V8.6.1)</p> <p>Modulation TS 05.04 (V8.3.0)</p> <p>Radio Transmission and Reception TS 05.05 (V8.10.0)</p> <p>General Packet Radio Service (GPRS); Stage 1 TS 22.060 (V3.5.0)</p> <p>Mobile Execution Environment (MexE) TS 23.057 (V3.4.0)</p> <p>General Packet Radio Service (GPRS) Service description; stage 2 TS 23.060 (V8.8.0)</p>
General Specifications	<p>UE Capability Requirements TR 21.904 (V3.3.0)</p> <p>UE Radio Access Capabilities TR 25.926 (V3.2.0)</p> <p>Vocabulary TR 25.990 (V3.0.0)</p> <p>Radio Interface Protocol Architecture TS 25.301 (V3.6.0)</p> <p>Services Provided by the Physical Layer TS 25.302 (V3.7.0)</p> <p>Synchronization in UTRAN Stage 2 TS 25.402 (V3.4.0)</p>
Performance/Test Specifications	<p>UE Radio Transmission and Reception (FDD) TS 25.101 (V3.5.0)</p> <p>Common Test Environments for User Equipment (UE) TS 34.108 (V3.2.0)</p> <p>Special Conformance Testing Functions TS 34.109 (V3.2.0)</p> <p>Terminal Conformance Specification TS 34.121 (V3.3.0)</p> <p>User Equipment (UE) Conformance Specification; Part 1: Protocol Conformance TS 34.123-1 (V3.2.0)</p> <p>User Equipment (UE) Conformance Specification; Part 2: Protocol Conformance TS 34.123-2 (V3.2.0)</p>

Item	Description
Performance/Test Specifications	Terminal Conformance Specification, Radio Transmission and Reception (FDD) TS 34.121 (V3.3.0) User Equipment (UE) Conformance Specification; Part 1: Protocol Conformance TS 34.123-1 (V3.2.0) S48 User Equipment (UE) Conformance Specification; Part 2: Implementation Conformance Statement (ICS) Specification TS 34.123-2 (V3.2.0)
USIM Specifications	SIM and IC Card Requirements TS 21.111 (V3.3.0) 3rd Gen. Partnership Proj Tech. Spec. Group Terminals; SIM App. Toolkit (USAT) TS 31.111 (V3.3.0)

# 6 Packing List

This chapter describes the items contained in the package of the R205.

Table 6-1 lists the items contained in the package of the R205.

**Table 6-1** Packing list of the R205

Item	Quantity	Remarks
Mobile WiFi	1	Standard
Rechargeable Battery (1500mAh)	1	Standard
USB Cable	1	Standard
Quick Start	1	Standard
Safety Information	1	Standard
Power Adapter	1	Standard
Warranty Card	1	Optional
Rechargeable Battery (2600mAh)	1	Optional
Cradle	1	Optional

---

# A Acronyms and Abbreviations

---

<b>3G</b>	The Third Generation
<b>3GPP</b>	3rd Generation Partnership Project
<b>APN</b>	Access Point Name
<b>ARPU</b>	Average Revenue Per User
<b>BSS</b>	Base Station Subsystem
<b>CM</b>	Connection Management
<b>CS domain</b>	Circuit Switched domain
<b>EDGE</b>	Enhanced Data Rates for GSM Evolution
<b>EGPRS</b>	Enhanced GPRS
<b>FDD</b>	Frequency Division Duplex
<b>GERAN</b>	GSM/EDGE Radio Access Network
<b>GPRS</b>	General Packet Radio Service
<b>GSM</b>	Global System for Mobile Communications
<b>HSUPA</b>	High Speed Uplink Packet Access
<b>HSDPA</b>	High Speed Downlink Packet Access
<b>IC</b>	Integrated Circuit
<b>LED</b>	Light Emitting Diode
<b>MAC</b>	Medium Access Control
<b>MexE</b>	Mobile Execution Environment
<b>MM</b>	Mobility Management
<b>Modem</b>	Modulator Demodulator
<b>MS</b>	Mobile Station
<b>MSC</b>	Mobile Switching Center

<b>NAS</b>	Non-Access Stratum
<b>OS</b>	Operating System
<b>PC/SC</b>	Personal Computer/Smart Card
<b>PIN</b>	Personal Identification Number
<b>PnP</b>	Plug and Play
<b>PP</b>	Point-to-Point
<b>PS domain</b>	Packet Switched domain
<b>PUK</b>	PIN Unblocking Key
<b>RF</b>	Radio Frequency
<b>RLC</b>	Radio Link Control
<b>RRC</b>	Radio Resource Control
<b>SGSN</b>	Serving GPRS Support Node
<b>SIM</b>	Subscriber Identity Module
<b>SMS</b>	Short Messaging Service
<b>SNDCP</b>	Subnetwork Dependent Convergence Protocol
<b>SOSH</b>	Small Office and Home Office
<b>TR</b>	Technical Report
<b>TS</b>	Technical Specification
<b>UE</b>	User Equipment
<b>UMTS</b>	Universal Mobile Telecommunications System
<b>USAT</b>	USIM Application Toolkit
<b>USB</b>	Universal Serial Bus
<b>USIM</b>	UMTS Subscriber Identity Module
<b>USSD</b>	Unstructured Supplementary Service Data
<b>UTRAN</b>	UMTS Terrestrial Radio Access Network
<b>WCDMA</b>	Wideband Code Division Multiple Access